

resimac<sup>®</sup>

## 204 XHT Paste

Designed for extreme wear environments, this solvent free epoxy withstands high operating temperatures, abrasion, and particle flow, offering long lasting protection in wet slurry and sliding wear applications.

- Suitable for high operating temperatures up to 240°C (464°F)
- Resists medium to large particle aggregate flow
- Resists extreme sliding abrasion
- High mechanical adhesion to metal substrates

2025 Product Sheet



# Typical Applications

204 XHT Paste is a two component, solvent free epoxy novolac repair compound formulated with ceramic beads to provide abrasion resistance in environments where particles and wet slurries cause wear. The solvent free formulation ensures safer handling and minimal environmental impact, while still offering high performance in extreme conditions.

- Slurry pumps
  - Bins & hoppers
  - Fan blades & housings
  - Internal pipe surfaces
- Wear plates
  - Pipe elbows
  - Chutes
  - Transport screws

# Cure times

Usable Life		Max overcoating time		Full Cure	
10°C/50°F	60 mins	10°C/50°F	24 hours	10°C/50°F	6 days
20°C/68°F	30 mins	20°C/68°F	12 hours	20°C/68°F	3 days
30°C/86°F	15 mins	30°C/86°F	6 hours	30°C/86°F	1.5 days
40°C/104°F	7.5 mins	40°C/104°F	3 hours	40°C/104°F	18 hours

# Characteristics

Appearance		Density	
Base	Dark grey paste	Base	2.21
Activator	Blue paste	Activator	2.26
Mixed	Dark blue paste	Mixed	2.23
Solids Content		Mixing Ratio	
100%		By weight	2:1
		By volume	2:1
Volume Capacity		Storage Life	
448cc/kg		5 years if unopened and stored in normal dry conditions, 15–30°C (59–86°F)	
Sag Resistance			
Nil at 10mm			

# Coverage

5kg (11lb) of fully mixed product will give the following coverage rates

0.747m² at 3mm	8.03ft² at 120mil
0.373m² at 6mm	4.01ft² at ¼"

Please note that the coverage rates quoted are theoretical and do not take into consideration the profile or condition of the surface being repaired.

## Mechanical Properties

### Abrasion Resistance

Taber H10 Wheels/1kg load  
42mm<sup>3</sup> loss/1000 cycles

### Compressive Strength

Tested to ASTM D695  
1046kg/cm<sup>2</sup> (14880psi)

### Corrosion Resistance

Tested to ASTM B117  
Minimum 1000 hours

### Flexural Strength

Tested to ASTM D790  
475kg/cm<sup>2</sup> (6710psi)

### Hardness

Shore D to ASTM D2240: 85

### Impact Resistance

Tested to ASTM D256 22J/m

### Adhesion

Tensile Shear to ASTM D1002 on  
abrasive blasted mild steel with 75  
micron profile 272kg/cm<sup>2</sup> (3840psi)

Pull off Adhesion to ASTM D4541 on  
abrasive blasted mild steel with 75  
micron profile 272kg/cm<sup>2</sup> (3840 psi)

### Heat Resistance

Full immersed resistance:  
Tested water/hydrocarbon  
immersion to 130°C (266°F)  
Pass (no blisters)

*Dry heat resistance:*

Tested to ASTM D2485  
Pass 240°C (464°F)

## Details & Legal

### Chemical Resistance

The product resists attack by a  
wide variety of inorganic acids,  
alkalis, salts and organic media. For  
more detailed information refer to  
the Resimac Technical Centre for  
advice.

### Pack Sizes

This product is available in the  
following pack sizes:  
1kg (2.2lbs)  
3kg (6.6lbs)

### Quality

All Resimac Products are supplied  
under the scope of the company's  
fully documented quality system.

### Warranty

Resimac warrants that the  
performance of the product  
supplied will conform to the typical  
descriptions quoted within this  
specification provided material is  
stored correctly and used  
according to the procedures  
detailed in this document.



# Application Guide

## A. Surface Preparation

### Metallic Substrates: Abrasive blast cleaning

- 1 All oil and grease must be removed from the surface using an appropriate cleaner such as MEK.
- 2 All surfaces must be abrasive blasted to *ISO 8501/4 Standard SA2.5 (SSPC SP10/ NACE 2)* minimum blast profile of 75 microns (3mil) using an angular abrasive.
- 3 Once blast cleaned, the surface must be degreased and cleaned using MEK or similar type material.
- 4 All surfaces must be coated before gingering or oxidation occurs.

## B. Product Preparation

### Prior to mixing, please ensure the following:

- 1 The base component is at a temperature between 15–25°C (60–77°F).
- 2 The ambient & surface temperature is above 10°C (50°F).
- 3 The ambient & surface temperatures are not less than 3°C (6°F) above the dew point.

*PLEASE NOTE: For salt contaminated surfaces the substrate must be pressure washed with clean water and checked for salt contamination, please refer to the surface preparation and pre-application guide for further information.*

## Health & Safety

Please ensure good practice is observed at all times during the mixing and application of this product. Protective gloves and other recommended personal protective equipment must be worn during the mixing and application of this product.

Before mixing and applying the material please ensure you have read and fully understood all information.

## C. Mixing

### If part mixing the unit of material:

- 1 Using the spatula provided place 2 equal measures from the base unit onto the mixing board provided.
- 2 Clean the spatula thoroughly.
- 3 Then take 1 equal measure from the activator unit and place alongside the base measures.
- 4 Mix the 2 components together until you have a streak free mix (mid grey) on the mixing board.
- 5 Ensure there is no unmixed material on the spatula or mixing board.

### If mixing a complete unit of material:

- 1 Dispense as much of the base and activator units onto a clean mixing board.
- 2 Mix the 2 components together until you have a streak free mix (dark blue) on the mixing board.
- 3 Ensure there is no unmixed material on the spatula or mixing board.

*PLEASE NOTE: From the commencement of mixing, the material should be used within 30 minutes at 20°C (68°F).*

## D. Application

### Step 1

Using a spatula or applicator tool, apply the material to the prepared surface.

### Step 2

Ensure the product is firmly pressed into any holes, scars, or cracks, and smooth the repair to achieve a seamless finish.

### Step 3

Apply in a single coat at wet film thickness of 3-6mm.


## Quick Application Guide



### Step 1

Ensure you have:

- 1 x base unit
- 1 x activator unit
- 1 x spatula
- 1 x applicator
- 1 x clean mixing board

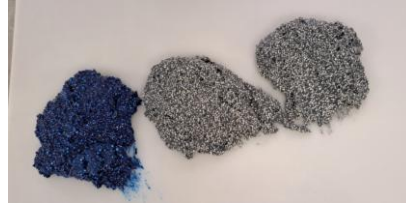

### Step 2

Take two equal measures of the base material, clean the spatula, then take one measure of the activator.



### Step 3

Use the provided spatula to mix both components, ensuring all material, including edges, is fully mixed.



### Step 4

To ensure the product is fully mixed create a diamond pattern on the surface and for any areas which are not blue in colour.



### Step 5

Once fully mixed, use the provided applicator to apply the beaded ceramic repair paste to the surface.

## About Resimac

A UK based manufacturer of epoxy and polyurethane coatings and repair materials.

From our head office in the heart of rural North Yorkshire, England we supply our range of Epoxy, Polyurethane & Silicone coatings and repair materials to the Oil & Gas, Petrochemical, Marine, Paper & Pulp, Water, Power Generation & Chemical Industries.

## Legal Notice

The data contained within this Product Specification is furnished for information only and is believed to be reliable at the time of issue. We cannot assume responsibility for results obtained by others over whose methods we have no control. It is the responsibility of the customer to determine the products suitability for use. Resimac accepts no liability arising out of the use of this information or the product described herein.

## Information & Enquiries

For more information and technical data please visit our website or contact us.

[www.resimacsolutions.com](http://www.resimacsolutions.com)

[info@resimac.co.uk](mailto:info@resimac.co.uk)

+44 (0) 1845 577498

Resimac Ltd,  
Unit B, Park Barn Estate,  
Station Road,  
Topcliffe,  
Thirsk,  
North Yorkshire,  
YO7 3SE,  
United kingdom

